


IP2LOCATION™ IP-COUNTRY-REGION-CITY-LATITUDE- LONGITUDE-ZIPCODE-TIMEZONE-ISP-DOMAIN-NETSPEED- AREACODE DATABASE

DATA FILE SPECIFICATIONS

Product:	IP2Location™ IP-Country-Region-City-Latitude-Longitude-ZIPCode-Timezone-ISP-Domain-Netspeed-AreaCode Database [DB16]
File Name:	IP2Location_IP_Country_Region_City_Latitude_Longitude_ZIPCode_Timezone_ISP_Domain_Netspeed_AreaCode_Specification.PDF
Total Records:	6,941,184
Total Fields:	15
Last Updated:	December 2009
Data Format Available:	<ul style="list-style-type: none"> i. CSV [Comma-Delimited ASCII] ii. BIN [IP2Location™ Binary Format]

FIELD #	FIELD NAME	DATA TYPE	FIELD DESCRIPTION
1	IP_FROM	NUMERICAL (DOUBLE)	Beginning of IP address range. The data is represented in IP number ¹ format.
2	IP_TO	NUMERICAL (DOUBLE)	Ending of IP address range. The data is represented in IP number ¹ format.
3	COUNTRY_CODE	CHAR(2)	Two-character country code based on ISO 3166.
4	COUNTRY_NAME	VARCHAR(64)	Country name based on ISO 3166.
5	REGION	VARCHAR(128)	Region name.
6	CITY	VARCHAR(128)	City name.
7	LATITUDE	NUMERICAL (DOUBLE)	City latitude. Default to capital city latitude if city is unknown.
8	LONGITUDE	NUMERICAL (DOUBLE)	City longitude. Default to capital city longitude if city is unknown.
9	ZIPCODE	CHAR(10)	ZIP codes for US and Canada cities only.
10	TIME_ZONE	VARCHAR(7)	Time zone in UTC (Coordinated Universal Time) with daylight saving time (DST).
11	ISP_NAME	VARCHAR(256)	Internet Service Provider registered under the IP address range.
12	DOMAIN_NAME	VARCHAR(128)	Domain name assigned to Internet network.

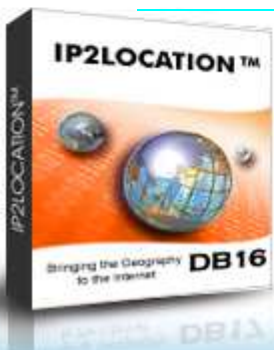

FIELD #	FIELD NAME	DATA TYPE	FIELD DESCRIPTION
13	NETSPEED	VARCHAR(10)	Internet Connection Speed (DIAL) DIAL-UP, (DSL) DSL/CABLE or (COMP) COMPANY
14	IDD_CODE	VARCHAR(5)	The IDD prefix to call the city from another country.
15	AREA_CODE	VARCHAR(30)	A varying length number assigned to geographic areas for call between cities.

Note:

¹ IP Address to IP Number Conversion

If the IP address 161.132.13.1, then the IP number is 2709785857.

$$\begin{aligned} \text{IP Number, X} &= 161 \times (256 \times 256 \times 256) + 132 \times (256 \times 256) + 13 \times (256) + 1 \\ &= 2709785857 \end{aligned}$$

In general, this is the formula to convert an IP Address to IP Number.

Let assume the IP Address is A.B.C.D.

$$\text{IP Number, X} = A \times (256 \times 256 \times 256) + B \times (256 \times 256) + C \times 256 + D$$

² Record Matching

First, convert the search IP Address to IP Number, X. Search a record that matches the range condition. You will get only one match per query. The country, city and ISP information is attached to country fields of the record.

$$\text{IP_FROM} \leq X \leq \text{IP_TO}$$

